


硬鋼線

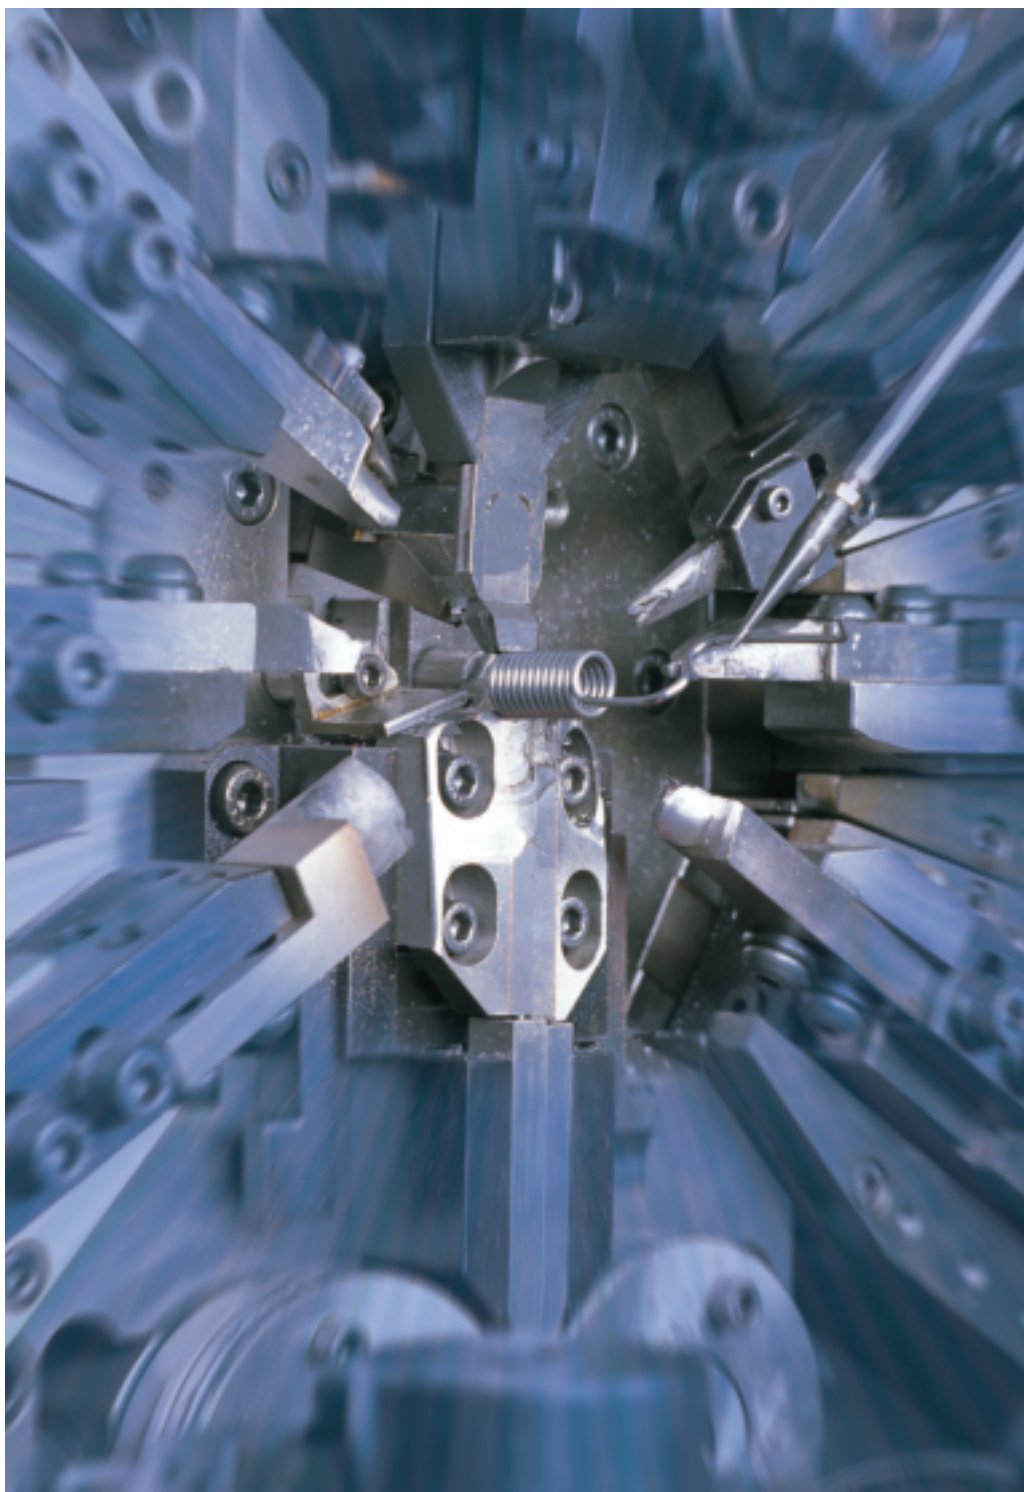

一般ばね用として、広くご愛用頂いております。硬鋼線は、長年の蓄積した技術をベースとしながらも、更なる品質向上を重ねてまいりました。ご使用されますばねの用途や形状に合わせて、表面性状や寸法公差・荷姿などご相談に対応させて頂いております。

■硬鋼線の仕様JIS規格 (JIS G 3521) とジェイ・ワイテックス社内規格

線 径 (mm)	公 差 (mm)		引張強さ (N/mm ²)			標準の荷姿		
	JIS規格	ジェイ・ワイテックス 社内規格	SW-A	SW-B	SW-C	釜 径 (mm)	質 量 (kg)	
0.40	± 0.015	+ 0.005 − 0.010	1670~1960	1960~2260	2260~2550	250	10	
0.50			1620~1910	1910~2210	2210~2500	300	20	
0.55	± 0.020	+ 0 − 0.015	1570~1860	1860~2160	2160~2450		25	
0.60			1570~1810	1810~2110	2110~2400			
0.65			1520~1770	1770~2060	2060~2350			
0.70				1770~2010	2010~2300			
0.80					2010~2260			
0.90			1470~1720	1720~1960	1960~2210	400	50	
1.00	± 0.030	+ 0 − 0.020	1420~1670	1670~1910	1910~2160	450	100	
1.20			1370~1620	1620~1860	1860~2110	550	125	
1.40			1320~1570	1570~1810	1810~2060			
1.60			1270~1520	1520~1770	1770~2010			
1.80			1270~1470	1470~1720	1720~1960			
2.00			± 0.040	+ 0 − 0.030	1230~1420	1420~1670		1670~1910
2.30	1180~1370	1370~1620			1620~1860			
2.60		1370~1570			1570~1810			
2.90					1570~1770	750		
3.20	± 0.050	+ 0 − 0.040	1130~1320	1320~1520	1520~1720			140
3.50			1080~1270	1270~1470	1470~1670			
4.00			1030~1230	1230~1420	1420~1620			
4.50			980~1180	1180~1370	1370~1570			
5.00	± 0.060	± 0.050	930~1130	1130~1320	1320~1520		850	
5.50			—	1080~1270	1270~1470			
6.00				1030~1230	1230~1420			
6.50				980~1180	1180~1370	1370~1570		
7.00					1130~1320	1320~1520		
8.00			± 0.070	—	1080~1270	1270~1470		
9.00	1030~1230	1230~1420						
10.00	1080~1270	1270~1470						
11.00	1030~1230	1230~1420						
12.00								
13.00								

※中間にある線径については、それより大きい線径の値を用いる。

用途やお客様の加工方法、加工形状に合う様に、表面性状や特性に対するご要望にお応え致します。

また、特殊サイズや荷姿についても、ご相談に応じさせていただきます。

W ジェイ・ワイテックス株式会社

■本店・第一事業所

〒597-0054 大阪府貝塚市堤300番地
TEL (072) 436-6802 FAX (072) 436-6812

■第二事業所

〒597-0015 大阪府貝塚市堀1丁目12番2号
TEL (072) 431-1309 FAX (072) 430-2961

■関東事業所

〒321-0155 栃木県宇都宮市西川田南2丁目5番12号
TEL (028) 658-0511 FAX (028) 658-0561

■営業本部・大阪支店

〒541-0053 大阪府大阪市中央区本町3丁目4番10号 野村ビル8階
TEL (06) 6125-1861 FAX (06) 6125-1869

■東京支店

〒100-0005 東京都千代田区丸の内1丁目8番1号 丸の内トラストタワーN館17階
TEL (03) 5288-8461 FAX (03) 5288-8505

■名古屋支店

〒450-0002 愛知県名古屋市中村区名駅4丁目2番25号 名古屋ビル東館9F
TEL (052) 569-2685 FAX (052) 569-2686

■広島営業所

〒730-0013 広島県広島市中区八丁堀15番10号 セントラルビル8階
TEL (082) 224-2766 FAX (082) 224-2788

■HEAD OFFICE :

300 TUTUMI, KAIZUKA, OSAKA 597-0054, JAPAN
TEL:072-436-6802 FAX:072-436-6812

■SALES DEPT. OSAKA BRANCH :

NOMURA BUILDING 8FL
4-10 HONMACHI 3-CHOME, CHUO-KU, OSAKA 541-0053, JAPAN
TEL:06-6125-1861 FAX:06-6125-1869

■SALES DEPT. TOKYO BRANCH :

MARUNOUCHI TRUST TOWER NORTH 17FL
8-1 MARUNOUCHI 1-CHOME, CHIYODA-KU, TOKYO 100-0005, JAPAN
TEL:03-5288-8461 FAX:03-5288-8505

■SALES DEPT. NAGOYA BRANCH :

NAGOYA BUILDING EAST 9FL
2-25 MEIEKI 4-CHOME, NAKAMURA-KU, NAGOYA 450-0002, JAPAN
TEL:052-569-2685 FAX:052-569-2686

■HIROSHIMA SALES OFFICE:

CENTRAL BUILDING 8FL
15-10 HATCHOBORI, NAKA-KU, HIROSHIMA 730-0013, JAPAN
TEL:082-224-2766 FAX:082-224-2788